

BIFACIAL MODULE WITH DUAL GLASS

RS9-710~730NBG-E1

N-Type /Positive power tolerance of 0~+3%/Max module efficiency 23.50%

- Suitable for ground power plants and distributed projects
- Advanced module technology delivers superior module efficiency
 - Non destructive cutting · MBB half-cut
- Excellent power generation performance
 - Excellent IAM and Weak light response · Low temperature ratings
 - 0.40% linear Power decline
- High module quality ensures long-term reliability
 - Strict selected material · Advanced technology · Leading standard
- Enhanced Mechanical Load
 - Mechanical performance up to 5400pa positive load and 2400pa negative load




Complete System and IEC Product Certification

IEC 61215, IEC 61730, ISO9001:
 2015:Quality Management System ISO14001:
 2015:Environment Management System
 ISO45001:2018:Occupational Health and Safety Management System

15 -Year ◀◀
 Material & Workmanship

30 -Year ◀◀
 Linear Power Output

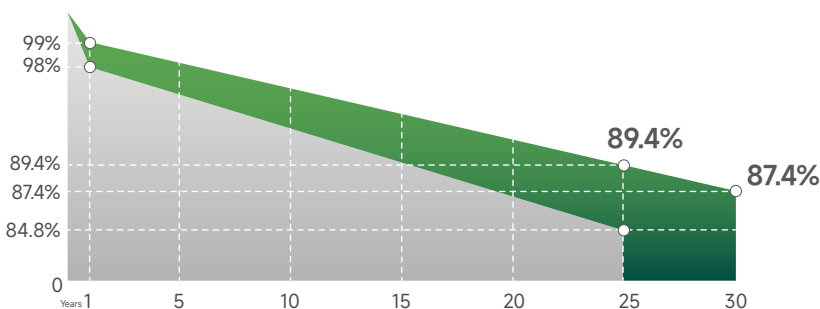

30-Year excess linear power output warranty

BLOOMBERG
TIER 1
 Global
 Leading Brand



